

LIVE Miniature Circuit Breaker - Single pole

ELECTRICAL


Product Code - CB1__B/C/D



Technical Data

- Rated Current (IN): 6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A.
- Rated Voltage (Ue): 230/400V AC
- Insulation Voltage Ui: 500V
- Breaking Capacity (Icn): 10kA
- Impulse Withstand Voltage: 4000V
- Dielectric Test Voltage Frq for 1 min (kV): 2
- Contact Position Degree: IP20
- Ambient Temperature: -5<40°C
- Box qty: 12
- Tripping Characteristic: B, C, D
- Electrical Endurance: 8,000 Cycles
- Mechanical Endurance: 20,000 Cycles
- Complies with BS EN 60898-1

Layout Drawing

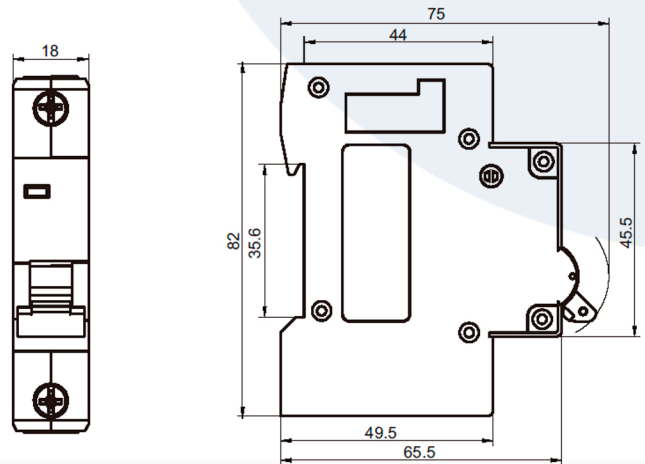

Features

CB range of MCB's have a breaking capacity of 10kA and current rating from 6A to 63A. They are available in B, C and D curves.

Switching and Isolating;
Overload and short circuit protection.

Curves

