



MANUFACTURED FROM 3mm MILD STEEL.  
 FINISH IS HOT DIPPED GALVANISED TO BS EN ISO 1461  
 AND POWDER COATED GREY TO RAL7043.  
 900 x 525 x 12mm BACKBOARD TREATED WITH A CLEAR  
 WATER REPELLENT.  
 M8 EARTHING POINTS FITTED TO PILLAR AND DOOR.  
 FITTED WITH TRI HEAD LOCKS.  
 HINGED USING STAINLESS STEEL HINGES.  
 DOOR APERTURE FULLY GASKETED.  
 FULLY DETACHABLE BITUMEN COATED ROOT.



GROUND LEVEL

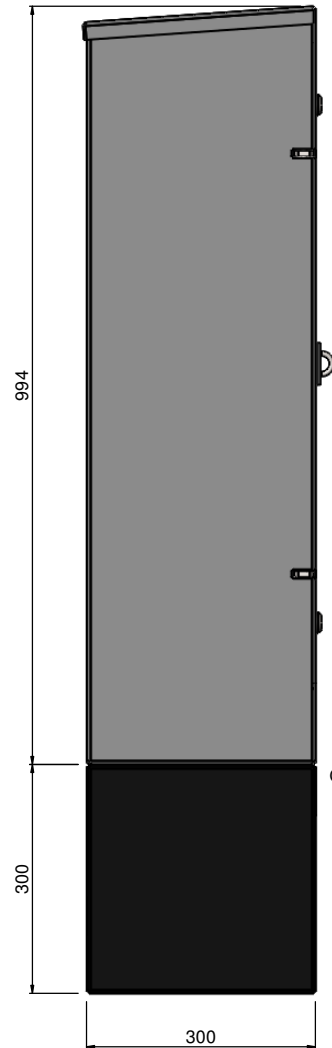

IF IN DOUBT, ASK.  
 REMOVE ALL BURRS AND SHARP EDGES.  
 ALL MATERIALS AND FINISHES TO BE COMPLIANT WITH 2002/90/EC (RoHS DIRECTIVE)

Material	MILD STEEL MANUFACTURED IN ACCORDANCE WITH BS EN 40	 Street Lighting Supplies & Co Limited 22 Abbotscott Road Strington FK3 9UX Tel: 01324 483900 Fax: 01324 484376 E-Mail: sales@streetlightingsupplies.com	Title <b>CP2/3/U/GREY                  CONTROL PILLAR (L)</b>	Tolerances Unless otherwise stated GENERAL ± 2.0mm HOLES ± 1.0mm ANGLES ± 1° Refer to BS4800: 1111
Finish	HOT DIPPED GALVANISED IN ACCORDANCE WITH BS EN ISO1461			
This document which is the property of STREET LIGHTING SUPPLIES & CO LIMITED, 22 Abbotscott Road, Strington, Strathclyde, FK3 9UX is supplied in confidence. It must not be used for any purpose other than that for which it is supplied, and must not be reproduced without permission in writing from this owner.				
ALPHABETICAL, ISSUE SYMBOLS DO NOT AUTHORISE MANUFACTURE. ALL DEVIATIONS FROM DRAWING TO BE REPORTED TO DEVELOPMENT.				

Approver A	Date
Drawn by	Date
John Monaghan	24-04-2018
Job No:	
Scale	N.T.S.
Drawing Number	LD1096-Asht1 A1
Sheet	1 of 1